

Specification

Nominal Voltage	2V
Capacity@30°C (86°F)	275.0Ah@5hr to 1.70V/cell
Dimensions	Length 125±2mm (4.92inches)
	Width 158±2mm (6.22 inches)
	Container Height 402±2mm (15.83 inches)
	Total Height (with Terminal) 434±2mm (17.09 inches)
Approx Weight	Without Electrolyte : 17.3 kg (38.15 lbs)
	With Electrolyte : 22.8 kg (50.271lbs)
Terminal Bolt	M10
Container Material	PP
Rated Capacity	385.0 AH/77.0A (5hr, 1.70V/cell, 30°C/86°F)
	192.5AH/385.0A (0.5hr, 1.50V/cell, 30°C/86°F)
Max. Discharge Current	3080A (5s)
Operating Temp. Range	Discharge : -15~55°C (5~131°F)
	Charge : 0~50°C (32~122°F)
	Storage : 5~40°C (41~104°F)
Cycle life	≥1200 cycles
Cycle Use	Initial Charging Current : less than 53.9A
	Voltage : 2.40V~2.50V at 25°C(77°F)
	Temp. Coefficient : -5mV/°C
Capacity affected by Temperature	40°C (104°F) 103%
	30°C (86°F) 100%
	0°C (32°F) 86%
Self Discharge	Less than 8 %C ₅ after storing 28 days at 20°C, and then a freshening charge is required. For higher temperature ,the time interval will be shorter.



Applications

- ♦ forklift
- ♦ traction vehicles
- ♦ transportation vehicles
- ♦ tram cars
- ♦ buses
- ♦ gymnastic and recreation locations.




Construction Features

- ♦ Nonwoven protective gauntlet, better elastic property, less pore size, less electrical resistance and higher air permeability.
- ♦ Flexible, fully isolated connector prevents any creeping current.
- ♦ Flip top plugs with special electrolyte level indication.
- ♦ Automatic refilling plugs are also available (according request).
- ♦ Imported microporous catercorner separator with advanced quality provides higher porosity and lower electrical resistance.
- ♦ Containers and lids are made of polypropylene (PP). The impact resistance is very good.
- ♦ Patented terminal sealing construction fully prevents plate growth and electrolyte leakage.

Dimensions

Terminal

Unit: mm [inches]

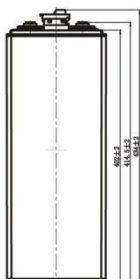


Terminal type: M10 bolt




■ Performance Characteristics


Discharge Characteristics

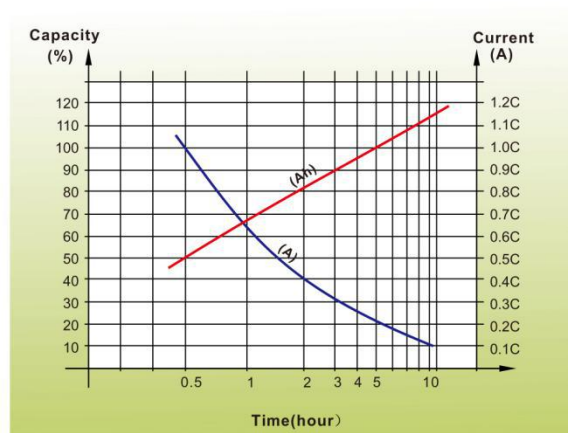


Electrolyte Density in Relation to Voltage

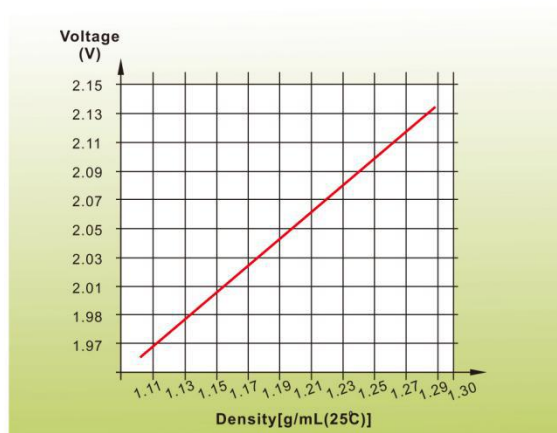


Electrolyte Density in Relation to Capacity

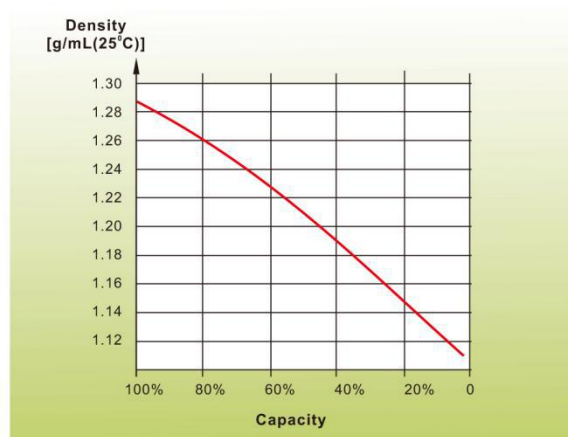


Temperature in Relation to Battery Capacity

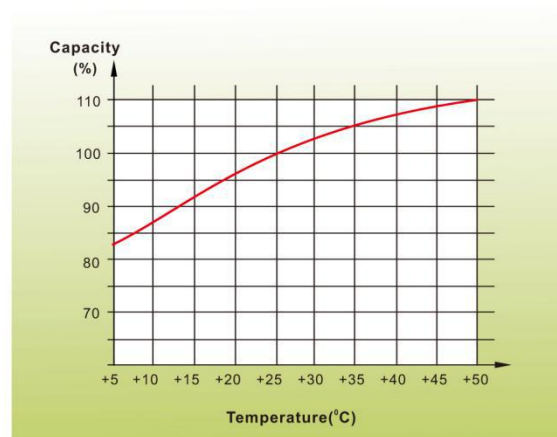

Discharge Characteristics

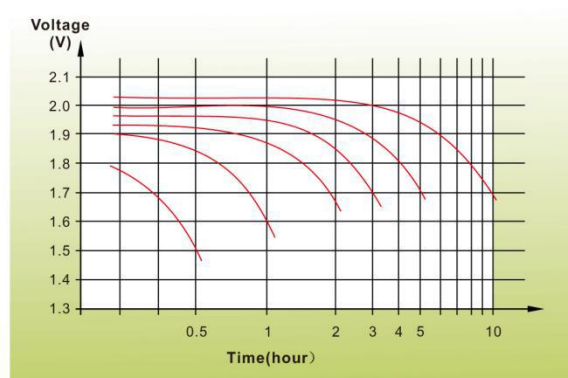

Cycle Life in Relation to Depth of Discharge

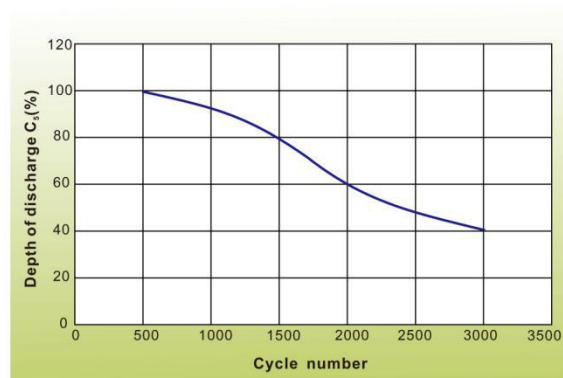

Sales Office

Guangdong JIYI General Electric Co., Ltd.

Oversea sales office Tel: +86-020-84869873

Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335

Fax: 020-34628335

E-mail: ge@gerch.cn

GERCH[®]

HTTP: //WWW.GERCH.CN