


### Product Image



### Product Dimensions

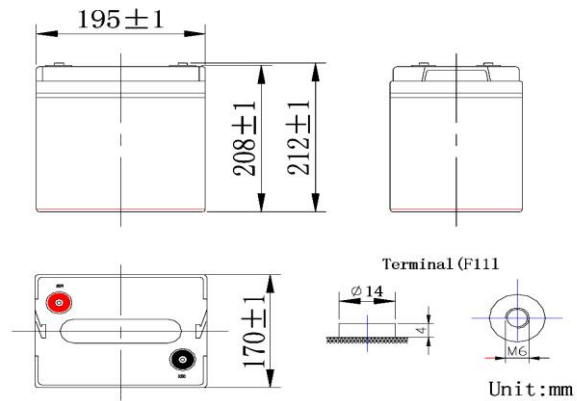

### Characteristics

Nominal Voltage		6V
Nominal Capacity (10 hour rate)		120Ah
Capacity 25°C (77°F)	20 hour rate (6.66A)	133.2Ah
	5 hour rate (21.96A)	109.8Ah
	1 hour rate (79.8A)	79.8Ah
Internal Resistance	Full Charged Battery 25°C	≤5.0mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	-20°C (-4°F)	82%
	-35°C (-31°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 30A Voltage 6.8-6.9V
	Cycle	Initial Charging Current Less than 30A Voltage 7.2-7.45V

### Packaging

Battery Dimensions	Length	195mm
	Width	170mm
	Height	208mm
	Total Height	212mm
Box Dimensions	Length	210mm
	Width	184mm
	Height	256mm
Quantity Per Box		1 PC per box
Net weight Per Cell		16.5 kg±200g
Net weight Per Box		16.5kg
Gross Weight		17kg

#### Discharge Constant Current per Cell (Amperes at 77°F25°C)









F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	403.5	268.8	202.6	126.1	90.5	79.8	48.7	35.6	22.9	14.0	12.5	6.9
1.65V	372.0	247.8	194.2	122.7	88.1	77.7	47.8	35.0	22.6	13.9	12.4	6.9
1.70V	378.3	252.0	185.7	119.3	85.6	75.5	46.9	34.3	22.3	13.7	12.2	6.8
1.75V	334.1	222.6	177.3	116.0	83.2	73.4	45.8	33.5	21.9	13.6	12.1	6.7
1.80V	315.2	210.0	168.8	112.6	80.8	71.3	44.6	32.6	21.6	13.4	12.0	6.7

#### Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	752.6	501.3	377.9	235.1	168.7	148.9	90.8	66.4	42.7	26.1	23.3	12.9
1.65V	693.8	462.2	362.1	228.8	164.2	144.9	89.1	65.1	42.1	25.8	23.0	12.8
1.70V	705.5	470.0	346.4	222.5	159.7	140.9	87.5	63.9	41.5	25.6	22.8	12.7
1.75V	623.2	415.1	330.6	216.2	155.1	137.0	85.4	62.4	40.9	25.4	22.6	12.5
1.80V	587.9	391.7	314.9	209.9	150.6	132.9	83.3	60.9	40.3	25.1	22.4	12.5

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

### Performance Characteristics

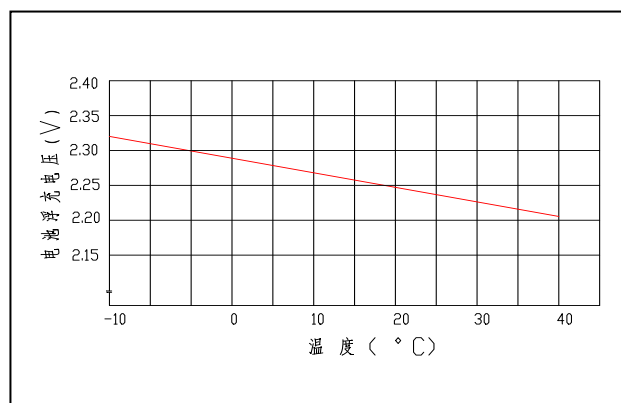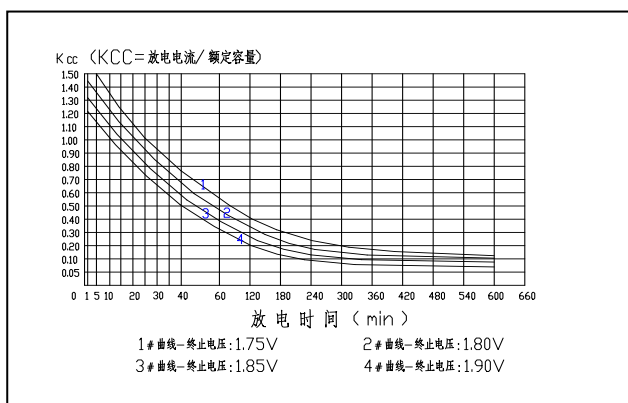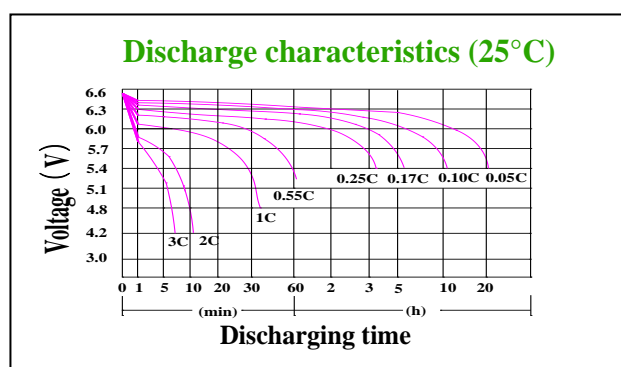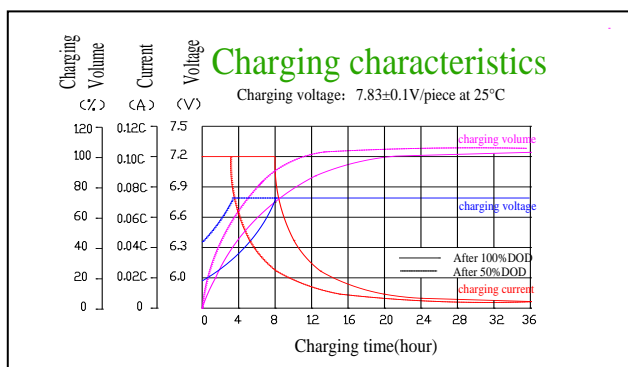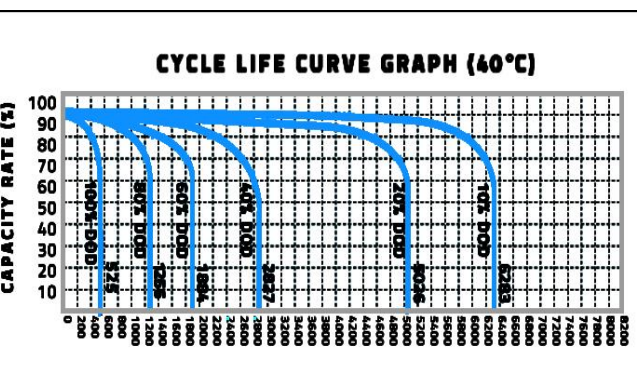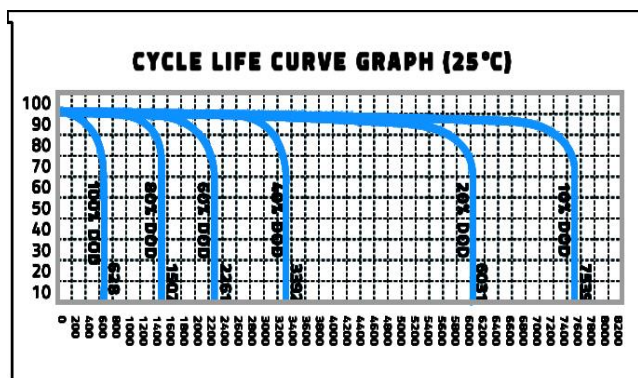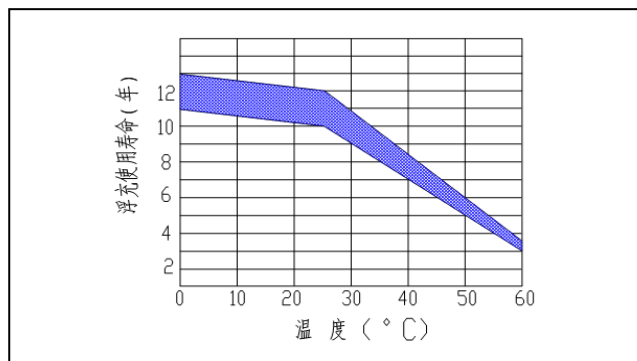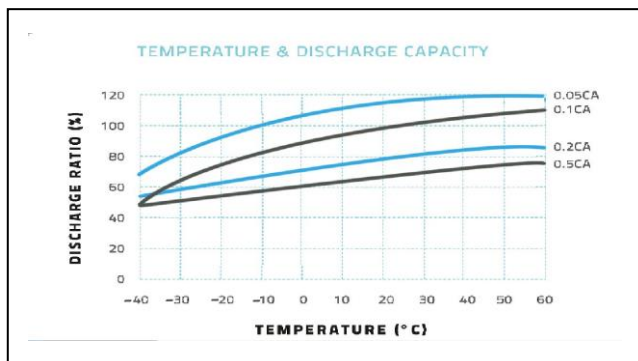

### Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Lead

Guangdong JiYi General Electric Co., Ltd.

Oversea sales office Tel: +86-020-84869873

Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335

Fax: 020-34628335

E-mail: ge@gerch.cn