

Product Image



Product Dimensions

Characteristics

Nominal Voltage		2V
Nominal Capacity (10 hour rate)		135Ah
Capacity 25°C (77°F)	20 hour rate (6.9A)	149.8Ah
	5 hour rate (23A)	121.5Ah
	1 hour rate (71.5A)	80.16Ah
Internal Resistance	Full Charged Battery 25°C	≤2mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	-20°C (-4°F)	82%
	-35°C (-31°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 33.8A Voltage 2.24-2.28V
	Cycle	Initial Charging Current Less than 33.8A Voltage 2.33-2.37V

Packaging

Battery Dimensions	Length	171mm
	Width	71mm
	Height	205mm
	Total Height	228mm
Box Dimensions	Length	224mm
	Width	187mm
	Height	261mm
Quantity Per Box		2 PC per box
Net weight Per Cell		6.0 kg±200g
Net weight Per Box		12.0kg
Gross Weight		12.5kg

Discharge Constant Current per Cell (Amperes at 77°F 25°C)









F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	453.94	302.40	227.90	141.83	101.76	89.78	54.76	39.99	25.73	15.69	14.04	7.80
1.65V	418.50	278.78	218.45	138.04	99.06	87.41	53.75	39.32	25.40	15.61	13.91	7.72
1.70V	425.59	283.50	208.91	134.24	96.27	84.97	52.73	38.56	25.06	15.44	13.77	7.64
1.75V	375.89	250.43	199.46	130.44	93.57	82.60	51.47	37.63	24.64	15.27	13.64	7.57
1.80V	354.63	236.25	189.93	126.65	90.87	80.16	50.20	36.70	24.30	15.10	13.50	7.49

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	846.62	563.96	425.08	264.52	189.76	167.48	102.09	74.67	48.01	29.36	26.16	14.51
1.65V	780.47	519.92	407.36	257.43	184.70	163.01	100.24	73.24	47.33	29.03	25.90	14.43
1.70V	793.72	528.69	389.64	250.34	179.63	158.54	98.38	71.89	46.66	28.77	25.65	14.26
1.75V	701.07	467.02	371.93	243.25	174.49	154.07	96.02	70.20	45.98	28.52	25.40	14.09
1.80V	661.42	440.61	354.21	236.17	169.43	149.51	93.66	68.51	45.31	28.18	25.14	14.01

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

Performance Characteristics

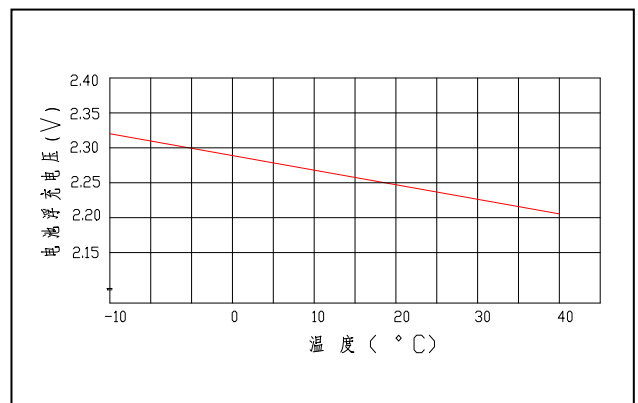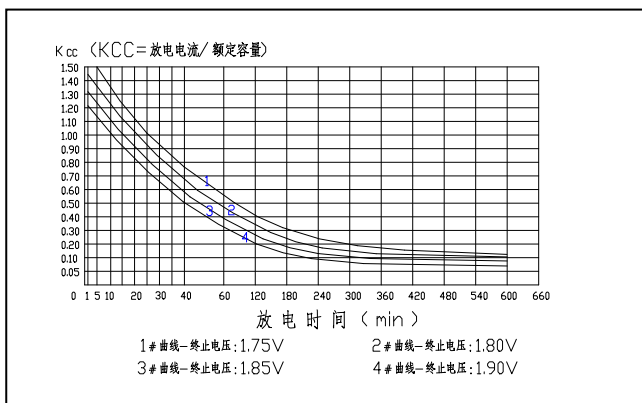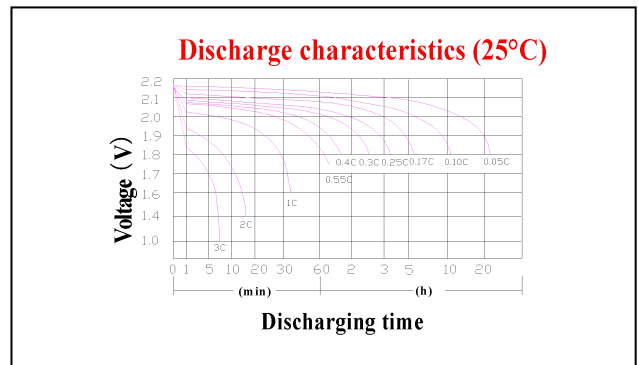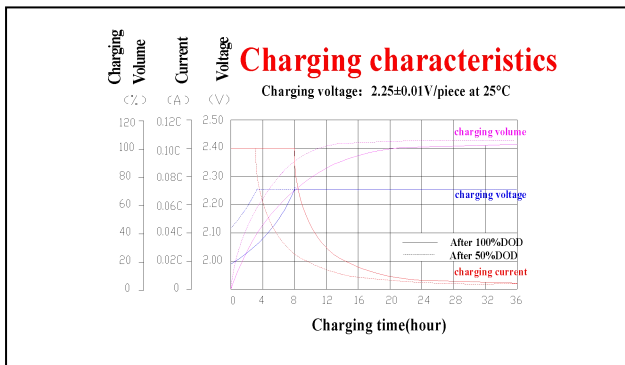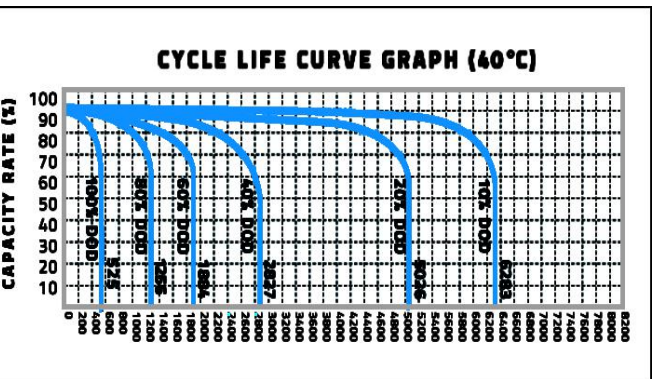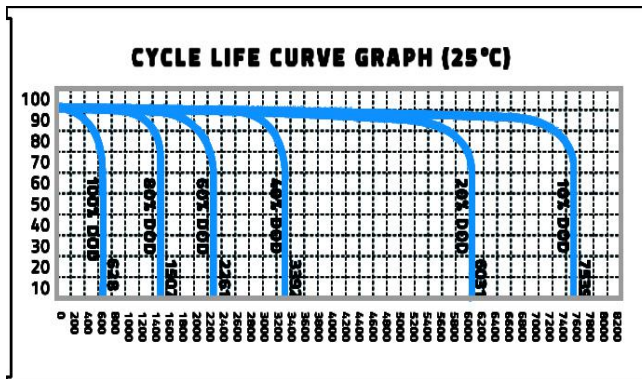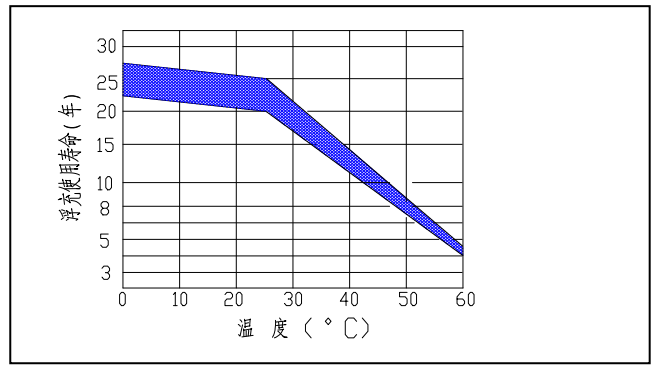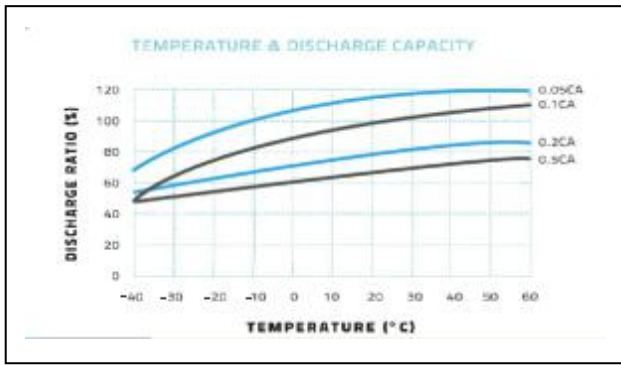

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Lead

Guangdong JiYi General Electric Co., Ltd.

Overseas sales office Tel: +86-020-84869873

Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335

Fax: 020-34628335

E-mail: ge@gerch.cn

GERCH[®]

HTTP: //WWW.GERCH.CN