


Product Image



Product Dimensions

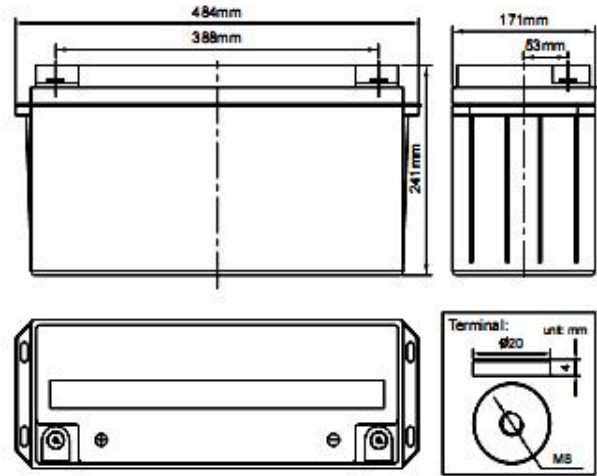

Characteristics

Nominal Voltage		12V
Nominal Capacity (20 hour rate)		150Ah
Capacity 25°C (77°F)	10 hour rate (13.5A)	135Ah
	5 hour rate (24.2A)	121.2Ah
	1 hour rate (83.3A)	83.3Ah
Internal Resistance	Full Charged Battery 25°C	≤4.0m Ω
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	90%
	-15°C (5°F)	70%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	92%
	after 6 month storage	84%
	after 12 month storage	65%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 37A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 37A Voltage 14.4-14.9V

Packaging

Battery Dimensions	Length	484mm
	Width	171mm
	Height	241mm
	Total Height	241mm
Box Dimensions	Length	499mm
	Width	185mm
	Height	299mm
Quantity Per Box		1 PC per box
Net weight Per Cell		45.5kg±3%
Net weight Per Box		45.5kg
Gross Weight		46.5kg

Discharge Constant Current per Cell (Amperes at 77°F25°C)







F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	193.1	123.3	90.6	83.2	52.9	37.1	25.2	16.6	14.9	8.25
1.65V	189.5	121.0	88.9	81.6	51.9	36.5	24.8	16.3	14.6	8.1
1.70V	186.0	118.8	87.3	80.1	50.9	35.8	24.3	16.0	14.3	7.95
1.75V	182.5	116.5	85.6	78.6	50.0	35.1	23.9	15.7	14.0	7.8
1.80V	175.5	112.1	82.4	75.6	48.1	33.8	23.0	15.1	13.5	7.50

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	371.6	237.3	174.4	160.1	101.8	71.5	48.6	32.0	28.6	15.9
1.65V	364.9	233.0	171.2	157.2	99.9	70.2	47.7	31.4	28.1	15.6
1.70V	358.1	228.6	168.0	154.3	98.1	68.9	46.8	30.9	27.5	15.3
1.75V	351.4	224.3	164.9	151.4	96.2	67.6	45.9	30.3	27.0	15.0
1.80V	337.8	215.7	158.5	145.5	92.5	65.0	44.2	29.1	26.0	14.4

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

Performance Characteristics

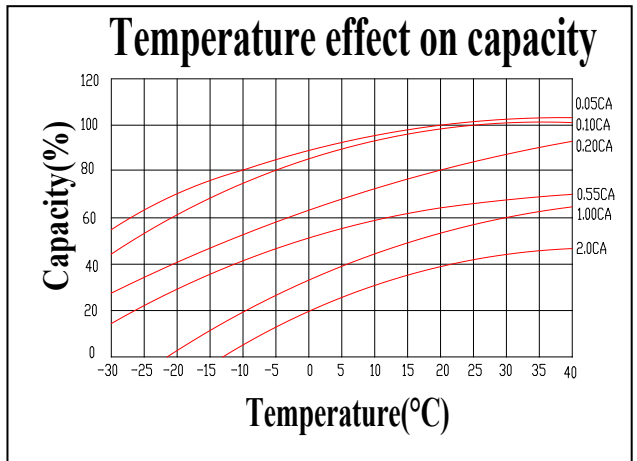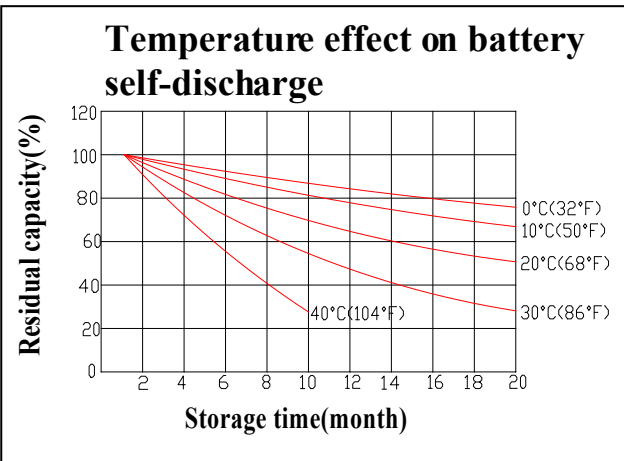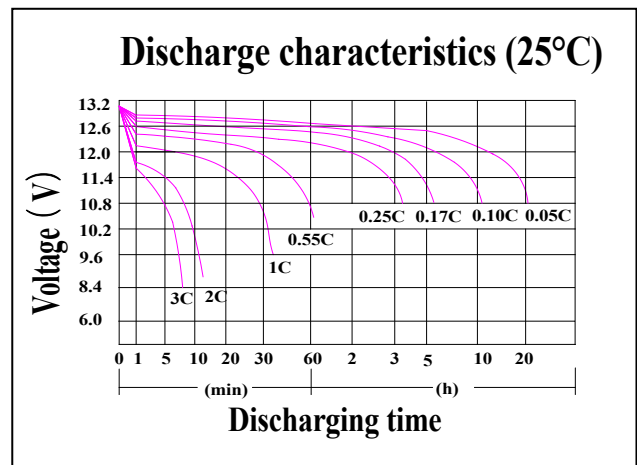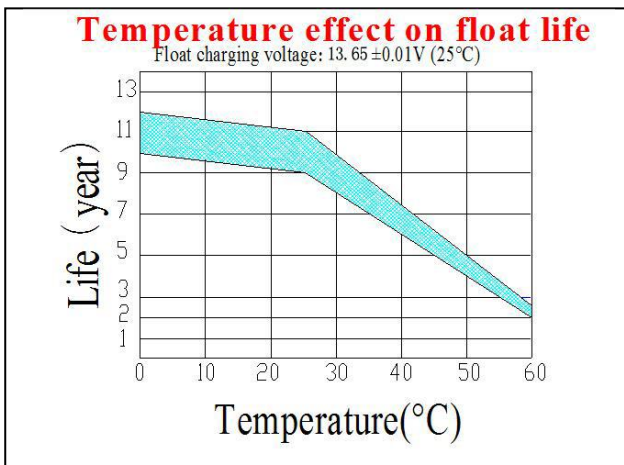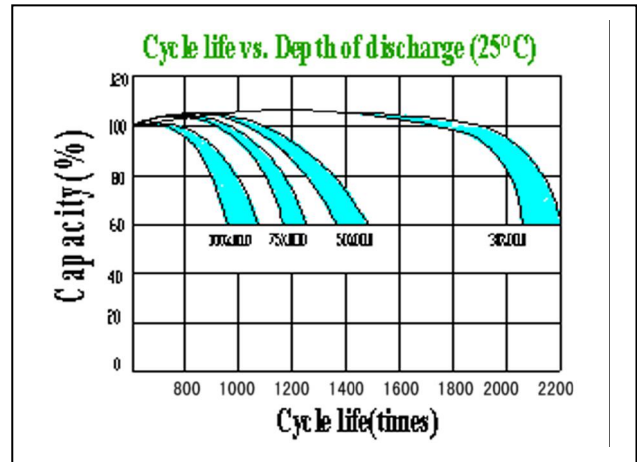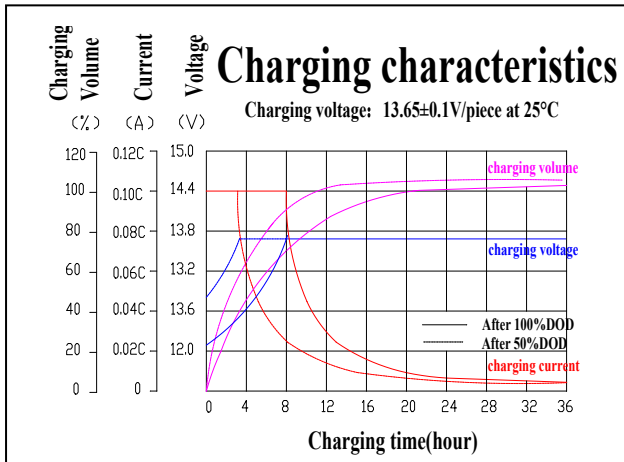

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Lead	Fiberglass	Sulfuric acid

Guangdong JiYi General Electric Co., Ltd.

Overseas sales office Tel: +86-020-84869873 Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335 Fax: 020-34628335

E-mail: ge@gerch.cn