


Product Image



Product Dimensions

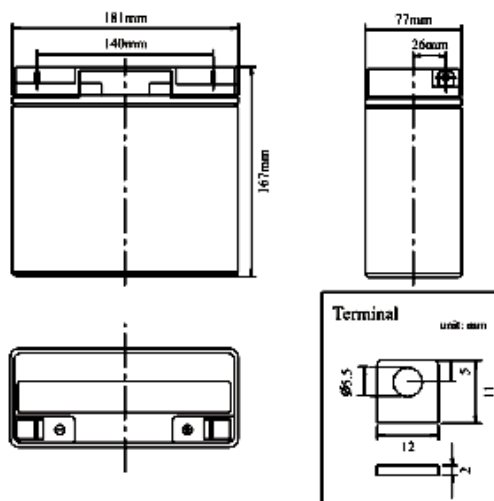

Characteristics

Nominal Voltage		12V
Nominal Capacity (20 hour rate)		18Ah
Capacity 25°C (77°F)	10 hour rate (1.72A)	17.2Ah
	5 hour rate (3.20A)	16.02Ah
	1 hour rate (11.88A)	11.88Ah
Internal Resistance	Full Charged Battery 25°C	≤12mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	-20°C (-4°F)	82%
	-35°C (-31°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 5.4A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 5.4A Voltage 14.4-15.0V

Packaging

Battery Dimensions	Length	181mm
	Width	77mm
	Height	167mm
	Total Height	167mm
Box Dimensions	Length	318mm
	Width	195mm
	Height	187mm
Quantity Per Box		4 pcs per box
Net weight Per Cell		5.35 kg±150g
Net weight Per Box		21.4kg
Gross Weight		21.9kg

Discharge Constant Current per Cell (Amperes at 77°F 25°C)









F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	33.44	27.86	18.58	13.32	11.48	5.08	4.95	3.37	2.21	1.98	1.05	33.44
1.65V	32.83	27.36	18.23	13.09	11.27	4.97	4.86	3.31	2.18	1.94	1.03	32.83
1.70V	32.22	26.84	17.89	12.83	11.07	4.88	4.77	3.24	2.14	1.91	1.01	32.22
1.75V	31.63	26.33	17.57	12.60	10.85	4.79	4.68	3.19	2.09	1.87	0.99	31.63
1.80V	30.40	25.33	16.88	12.11	10.44	4.61	4.50	3.06	2.02	1.80	0.95	30.40

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	64.37	53.62	35.75	25.65	22.10	9.76	9.52	6.48	4.27	3.82	2.02	64.37
1.65V	63.20	52.65	35.10	25.18	21.71	9.58	9.36	6.35	4.19	3.74	1.98	63.20
1.70V	62.03	51.68	34.45	24.71	21.29	9.40	9.18	6.25	4.12	3.67	1.94	62.03
1.75V	60.86	50.71	33.80	24.25	20.90	9.23	9.02	6.12	4.03	3.60	1.91	60.86
1.80V	58.52	48.74	32.51	23.33	20.11	8.87	8.66	5.89	3.89	3.47	1.84	58.52

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

Performance Characteristics

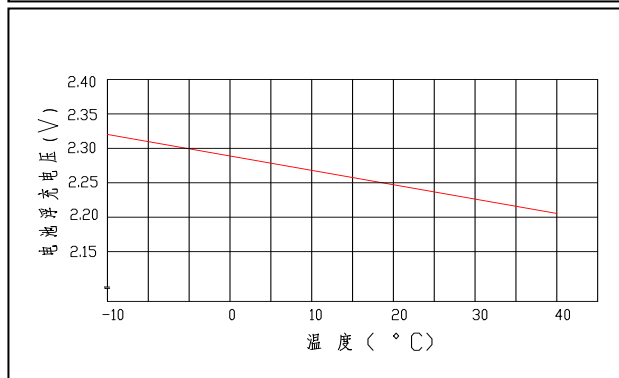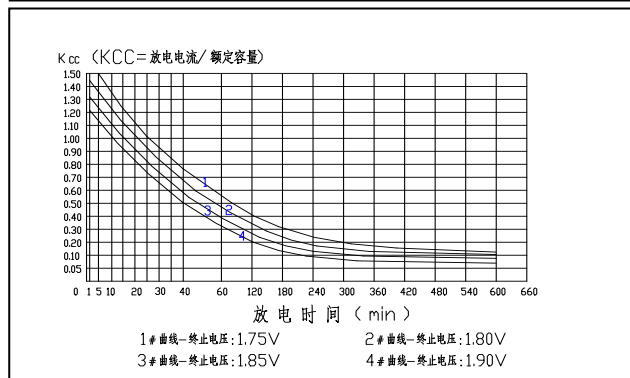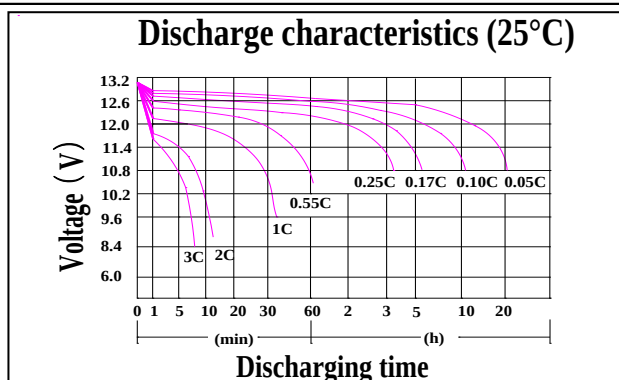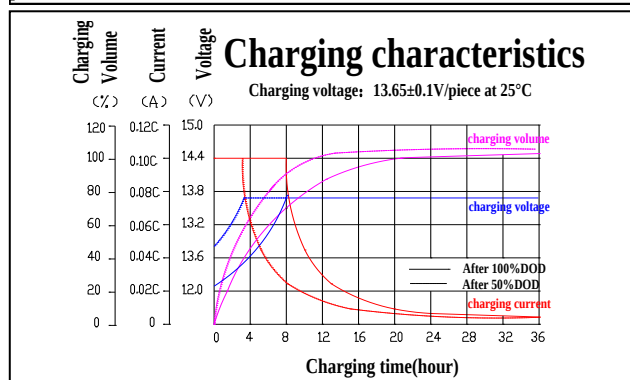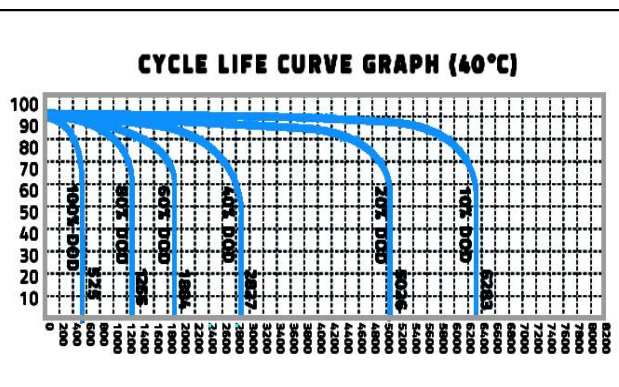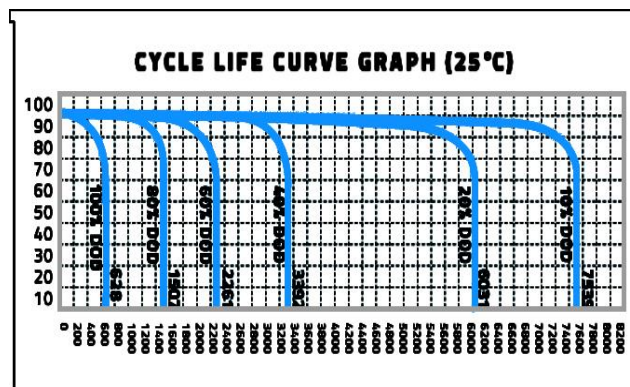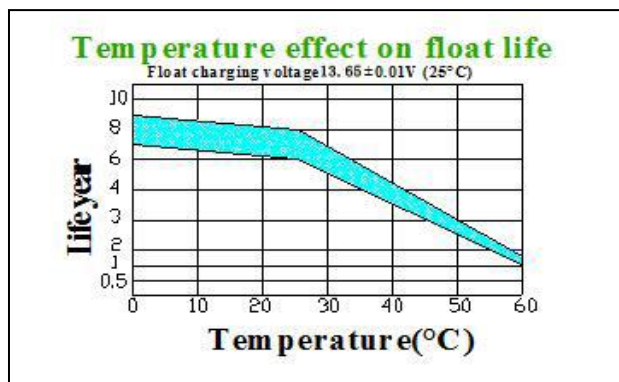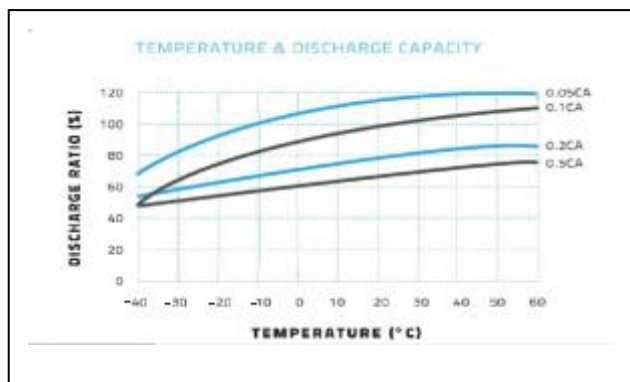

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Nano

Guangdong JiYi General Electric Co., Ltd.

Oversea sales office Tel: +86-020-84869873

Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335

Fax: 020-34628335

E-mail: ge@gerch.cn