


Product Image



Product Dimensions

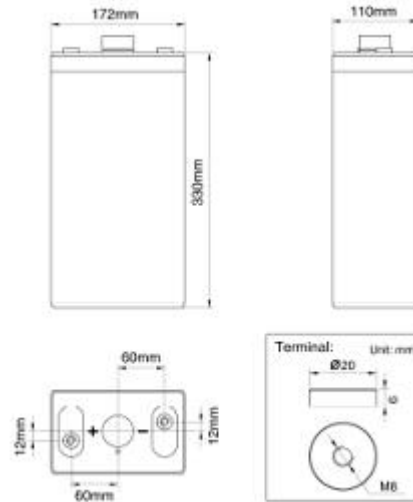

Characteristics

Nominal Voltage		2V
Nominal Capacity (10 hour rate)		200Ah
Capacity 25°C (77°F)	20 hour rate (10.6A)	212Ah
	5 hour rate (35.32A)	176.6Ah
	1 hour rate (110A)	110Ah
Internal Resistance	Full Charged Battery 25°C	≤0.5m Ω
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	-20°C (-4°F)	82%
	-35°C (-31°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 40A Voltage 2.23-2.27V
	Cycle	Initial Charging Current Less than 40A Voltage 2.33-2.37V

Packaging

Battery Dimensions	Length	173mm
	Width	111mm
	Height	330mm
	Total Height	365mm
Box Dimensions	Length	186mm
	Width	124mm
	Height	422mm
Quantity Per Box		1 PC per box
Net weight Per Cell		13 kg±200g
Net weight Per Box		13kg
Gross Weight		13.8kg

Discharge Constant Current per Cell (Amperes at 77°F25°C)









F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	578.0	371.6	309.6	206.4	148.0	127.6	56.4	55.0	37.4	24.6	22.0	11.7
1.65V	567.4	364.8	304.0	202.6	145.4	125.2	55.2	54.0	36.8	24.2	21.6	11.4
1.70V	557.0	358.0	298.2	198.8	142.6	123.0	54.2	53.0	36.0	23.8	21.2	11.2
1.75V	546.4	351.4	292.6	195.2	140.0	120.6	53.2	52.0	35.4	23.2	20.8	11.0
1.80V	525.4	337.8	281.4	187.6	134.6	116.0	51.2	50.0	34.0	22.4	20.0	10.6

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	1112.6	715.2	595.8	397.2	285.0	245.6	108.4	105.8	72.0	47.4	42.4	22.4
1.65V	1092.4	702.2	585.0	390.0	279.8	241.2	106.4	104.0	70.6	46.6	41.6	22.0
1.70V	1072.0	689.2	574.2	382.8	274.6	236.6	104.4	102.0	69.4	45.8	40.8	21.6
1.75V	1051.8	676.2	563.4	375.6	269.4	232.2	102.6	100.2	68.0	44.8	40.0	21.2
1.80V	1011.4	650.2	541.6	361.2	259.2	223.4	98.6	96.2	65.4	43.2	38.6	20.4

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

Performance Characteristics

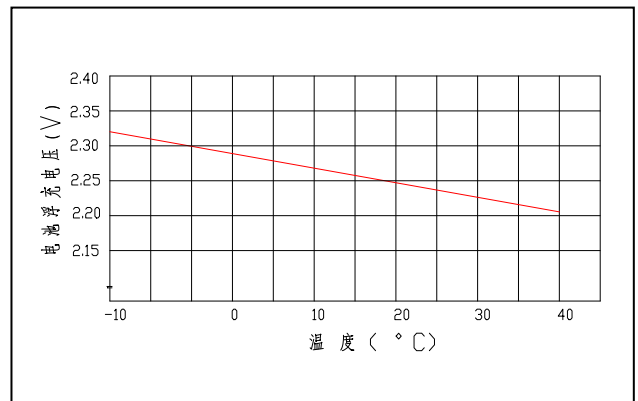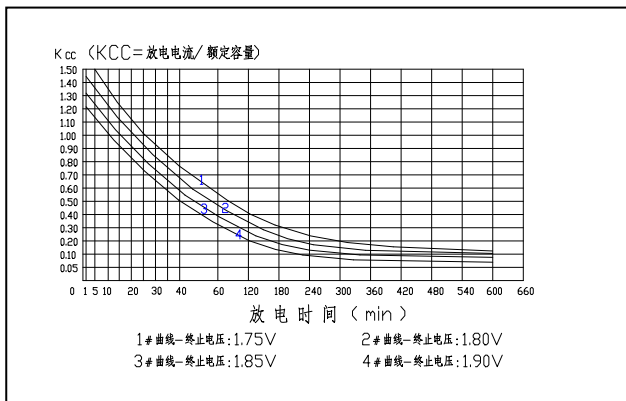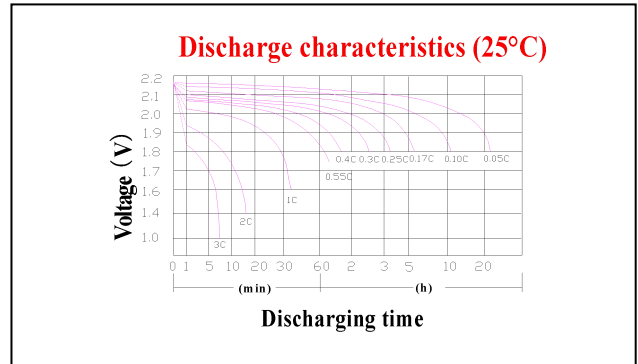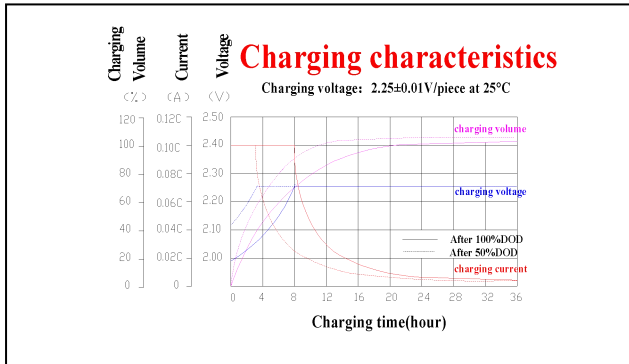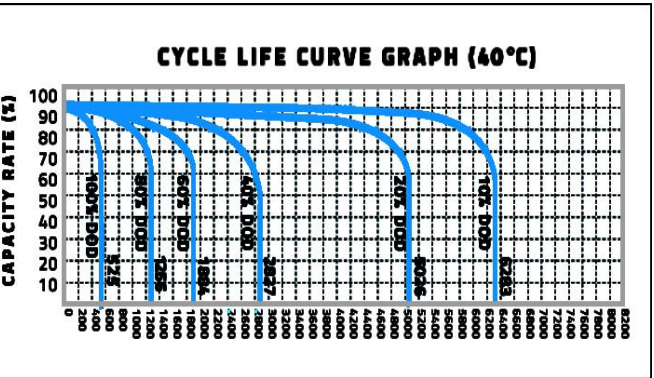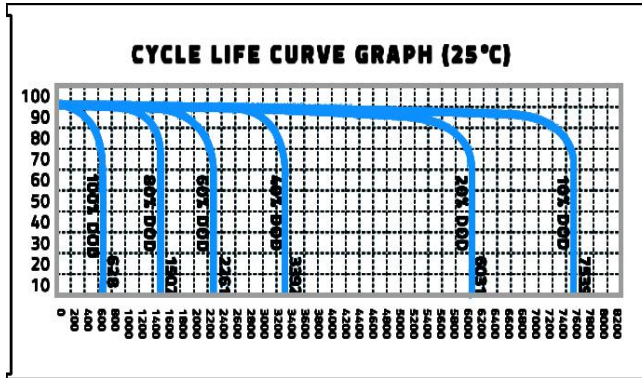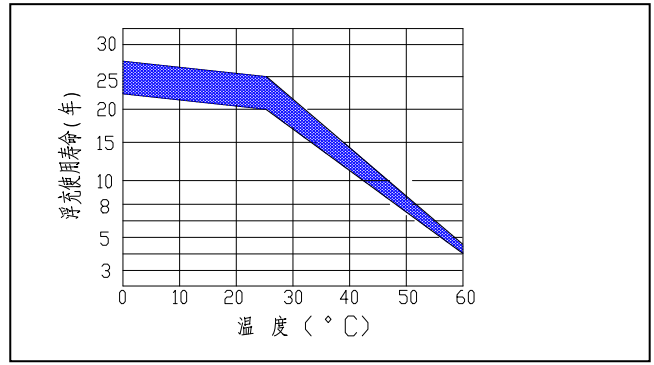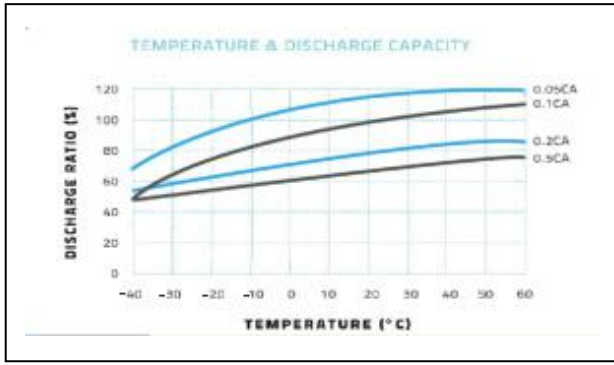

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Lead

Guangdong JiYi General Electric Co., Ltd.

Oversea sales office Tel: +86-020-84869873

Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335

Fax: 020-34628335

E-mail: ge@gerch.cn

GERCH®

HTTP: //WWW.GERCH.CN