


Product Image



Product Dimensions

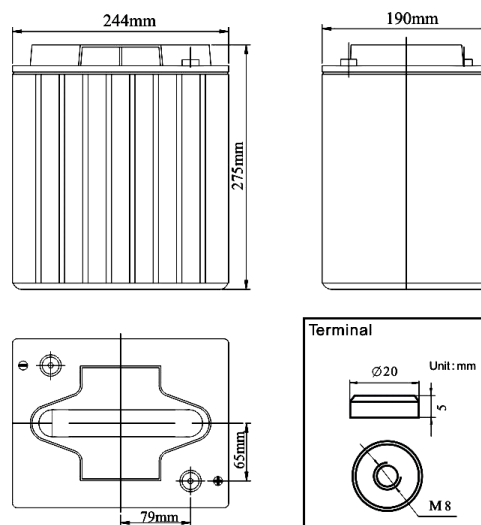

Characteristics

Nominal Voltage		6V
Nominal Capacity (10 hour rate)		225Ah
Capacity 25°C (77°F)	20 hour rate (12.5A)	249.8Ah
	5 hour rate (41.2A)	205.9Ah
	1 hour rate (149.6A)	149.6Ah
Internal Resistance	Full Charged Battery 25°C	≤2.7mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	-20°C (-4°F)	82%
	-35°C (-31°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 56.25A Voltage 6.8-6.9V
	Cycle	Initial Charging Current Less than 56.25A Voltage 7.2-7.45V

Packaging

Battery Dimensions	Length	244mm
	Width	190mm
	Height	275mm
	Total Height	275mm
Box Dimensions	Length	258mm
	Width	201mm
	Height	335mm
Quantity Per Box		1 PC per box
Net weight Per Cell		31.0 kg±200g
Net weight Per Box		31.0kg
Gross Weight		31.5kg

Discharge Constant Current per Cell (Amperes at 77°F25°C)









F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	756.6	504.0	379.8	236.4	169.6	149.6	91.3	66.7	42.9	26.2	23.4	13.0
1.65V	697.5	464.6	364.1	230.1	165.1	145.7	89.6	65.5	42.3	26.0	23.2	12.9
1.70V	709.3	472.5	348.2	223.7	160.5	141.6	87.9	64.3	41.8	25.7	23.0	12.7
1.75V	626.5	417.4	332.4	217.4	156.0	137.7	85.8	62.7	41.1	25.5	22.7	12.6
1.80V	591.0	393.8	316.5	211.1	151.5	133.6	83.7	61.2	40.5	25.2	22.5	12.5

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	1411.0	939.9	708.5	440.9	316.3	279.1	170.2	124.5	80.0	48.9	43.6	24.2
1.65V	1300.8	866.5	678.9	429.0	307.8	271.7	167.1	122.1	78.9	48.4	43.2	24.0
1.70V	1322.9	881.2	649.4	417.2	299.4	264.2	164.0	119.8	77.8	48.0	42.8	23.8
1.75V	1168.5	778.4	619.9	405.4	290.8	256.8	160.0	117.0	76.6	47.5	42.3	23.5
1.80V	1102.4	734.3	590.3	393.6	282.4	249.2	156.1	114.2	75.5	47.0	41.9	23.3

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

Performance Characteristics

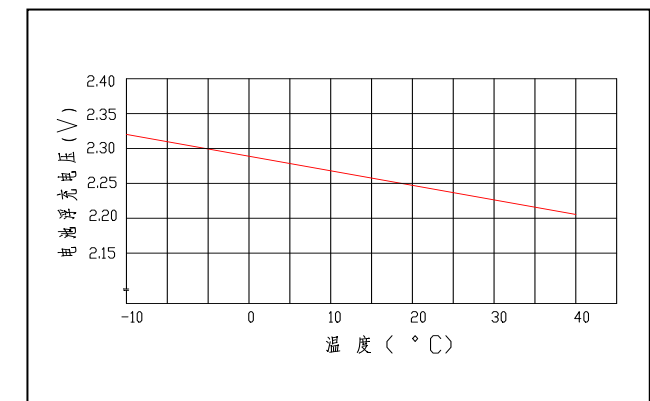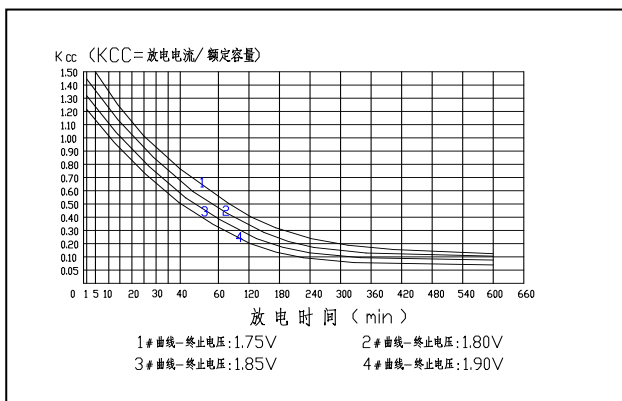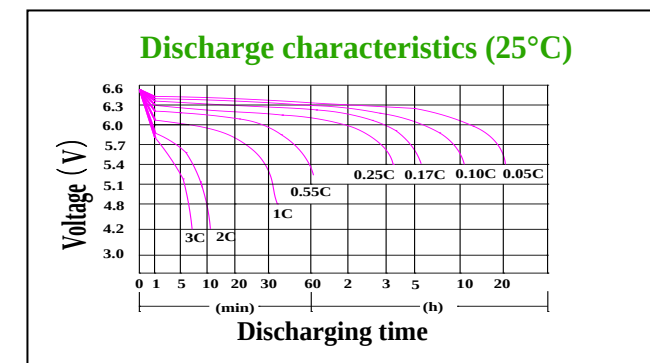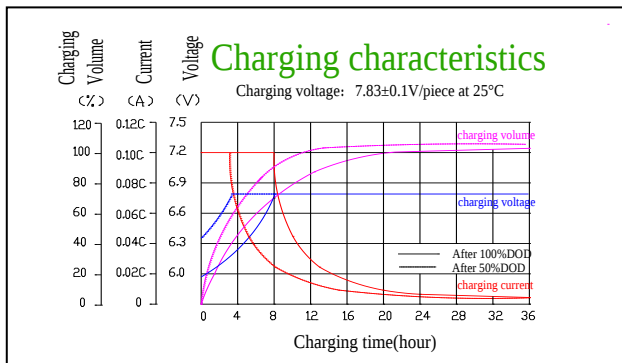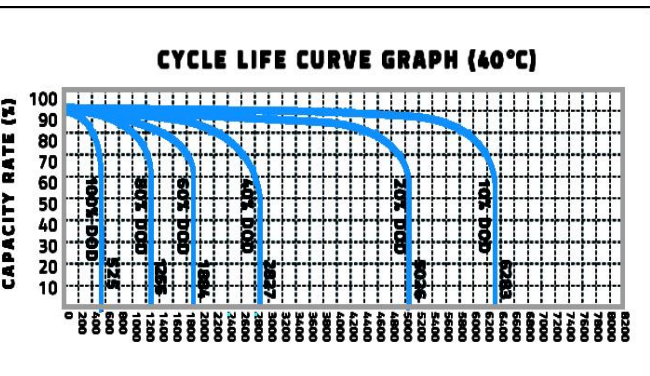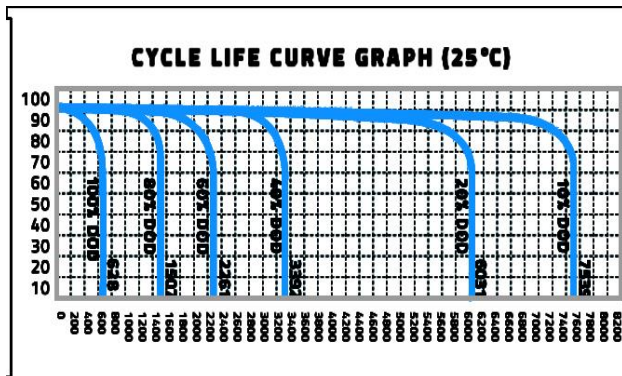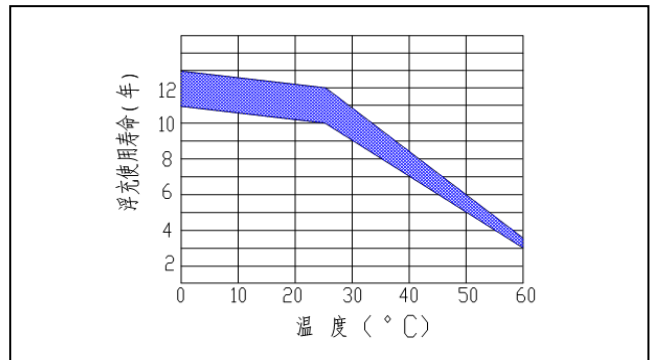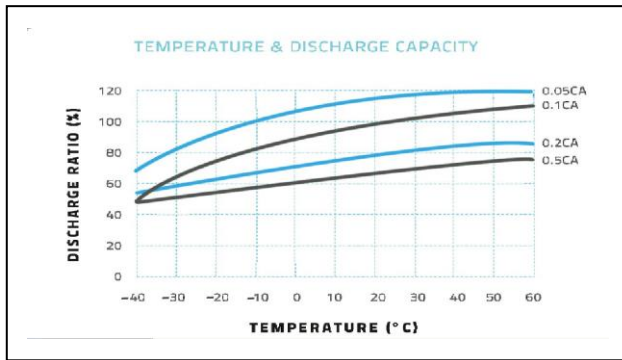

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Lead

Guangdong JiYi General Electric Co., Ltd.

Oversea sales office Tel: +86-020-84869873

Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335

Fax: 020-34628335

E-mail: ge@gerch.cn