


### Product Image



### Product Dimensions

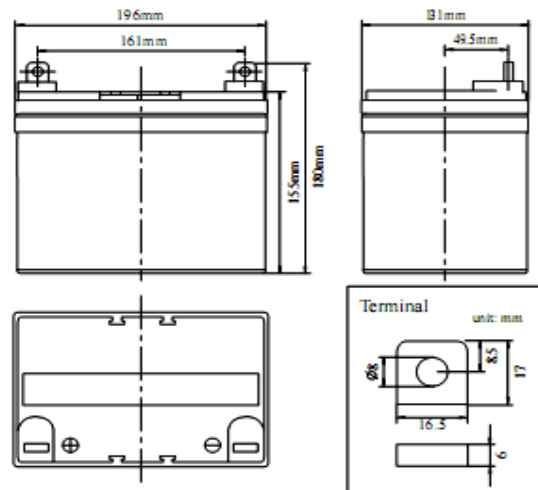

### Characteristics

Nominal Voltage		12V
Nominal Capacity (10 hour rate)		33Ah
Capacity 25°C (77°F)	20 hour rate (1.83A)	36.6Ah
	5 hour rate (6.0A)	30.2Ah
	1 hour rate (22.0A)	22.0Ah
Internal Resistance	Full Charged Battery 25°C	≤11mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 8.25A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 8.25A Voltage 14.4-14.9V

### Packaging

Battery Dimensions	Length	196mm
	Width	131mm
	Height	155mm
	Total Height	180mm
Box Dimensions	Length	211mm
	Width	144mm
	Height	211mm
Quantity Per Box		1 PC per box
Net weight Per Cell		10.5 kg±100g
Net weight Per Box		10.5kg
Gross Weight		10.8kg

### Discharge Constant Current per Cell (Amperes at 77°F 25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	111.0	73.9	55.7	34.7	24.9	22.0	13.4	9.8	6.3	3.8	3.43	1.90
1.65V	104.0	69.3	53.4	33.7	24.2	21.4	13.1	9.6	6.2	3.8	3.40	1.89
1.70V	102.3	68.1	51.1	32.8	23.5	20.8	12.9	9.4	6.1	3.8	3.37	1.87
1.75V	91.9	61.2	48.8	31.9	22.9	20.2	12.6	9.2	6.0	3.7	3.33	1.85
1.80V	86.7	57.8	46.4	31.0	22.2	19.6	12.3	9.0	5.9	3.7	3.30	1.83

### Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	206.9	137.9	103.9	64.7	46.4	40.9	25.0	18.2	11.7	7.2	6.4	3.6
1.65V	194.0	129.2	99.6	62.9	45.1	39.8	24.5	17.9	11.6	7.1	6.3	3.5
1.70V	190.8	127.1	95.3	61.2	43.9	38.8	24.0	17.6	11.4	7.0	6.3	3.5
1.75V	171.4	114.2	90.9	59.5	42.7	37.7	23.5	17.2	11.2	7.0	6.2	3.4
1.80V	161.7	107.7	86.6	57.7	41.4	36.6	22.9	16.7	11.1	6.9	6.2	3.4

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

### Performance Characteristics

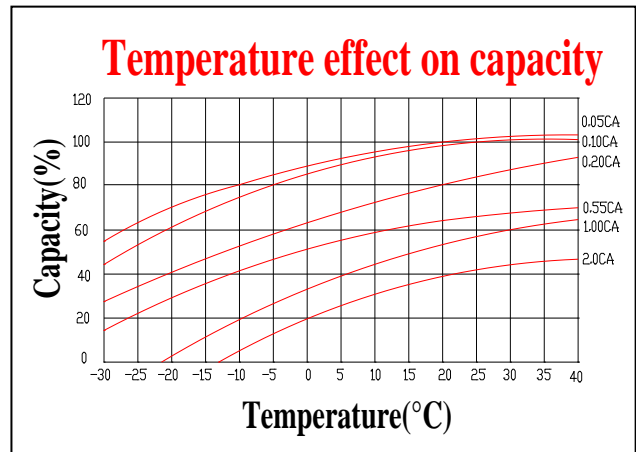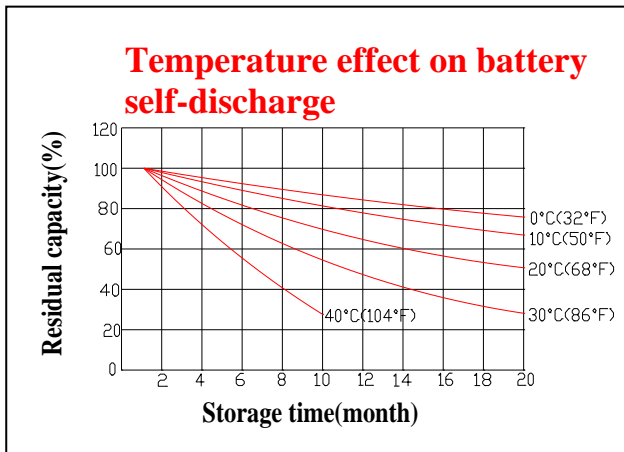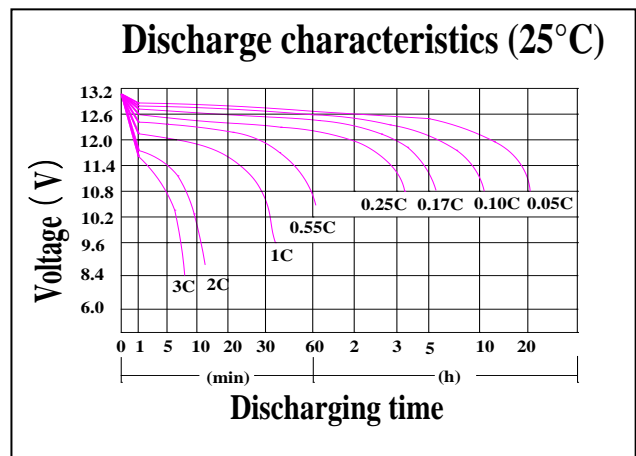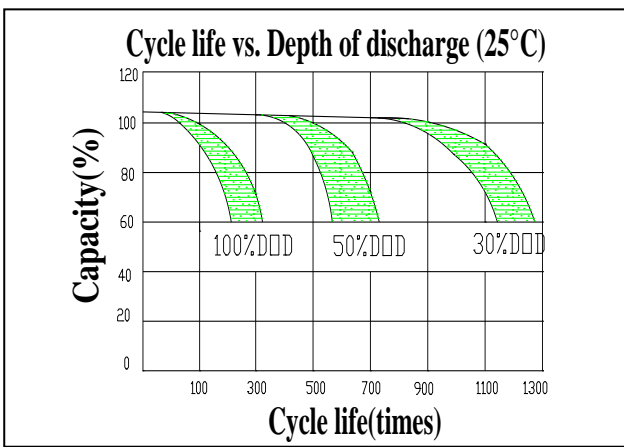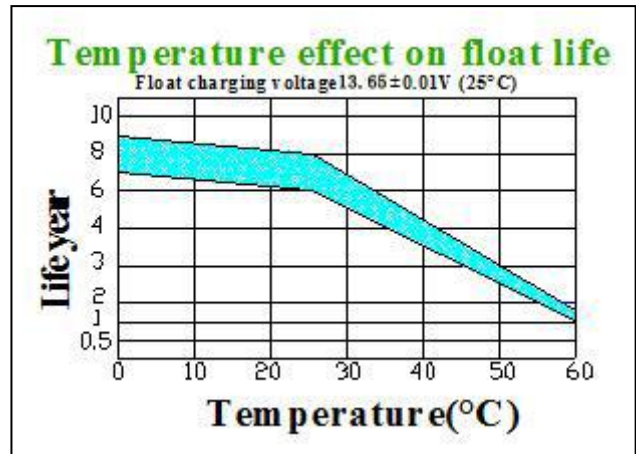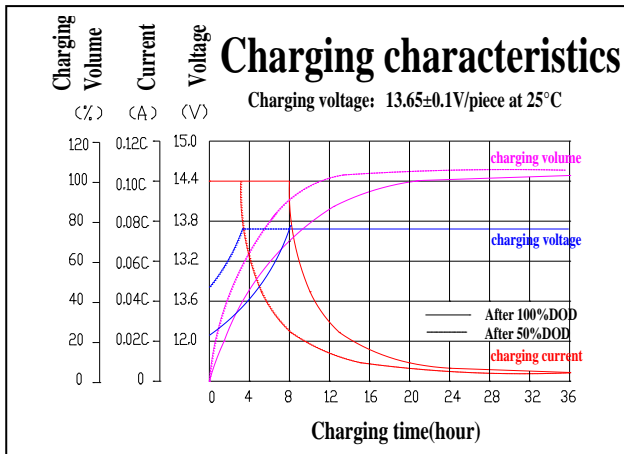

### Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid

**Guangdong JiYi General Electric Co., Ltd.**

Overseas sales office Tel: +86-020-84869873 Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335 Fax: 020-34628335

E-mail: ge@gerch.cn