

GERCH[®] Guangdong JiYi General Electric Co., Ltd.

GE 6V、12V Series battery:


GE 6V、12V series is a general purpose battery with 8 years designed life in float service. It meets with IEC, JIS and BS standards .With up-dated AGM valve regulated technology and high purity raw materials, the GE 6V、12V series battery maintains high consistency for better performance and reliable standby service life.It is suitable for UPS/EPS, telecom , medical equipment, emergency light and security system applications.

General Specifications


Medium Sealed Rechargeable Lead-Acid Batteries

Model	Nominal Voltage(V)	Rated Capacity@25°C		Approx Dimensions								Approx Weight		Terminals Type	Layout
		10HR 1.80V/Cell	1HR 1.75V/Cell	Length		Width		Hight		Total Hight		kgs.	lbs.		
				mm	in.	mm	in.	mm	in.	mm	in.				
GE100-6	6	100	55.0	195	7.68	170	6.69	206	8.11	209	8.23	15.9	35.05	F	5
GE120-6	6	120	66.0	195	7.68	170	6.69	206	8.11	209	8.23	17	37.48	F	5
GE130-6	6	130	71.5	260	10.24	180	7.09	247	9.72	251	9.88	20.5	45.19	H	6
GE180A-6	6	180	99.0	260	10.24	180	7.09	247	9.72	251	9.88	29	63.93	H	6
GE180-6	6	180	99.0	306	12.05	168	6.61	220	8.66	225	8.86	29	63.93	H	6
GE200A-6	6	200	110.0	260	10.24	180	7.09	247	9.72	251	9.88	30	66.14	H	6
GE200-6	6	200	110.0	323	12.72	178	7.01	224	8.82	227	8.94	30.2	66.58	H	5
GE210-6	6	210	116.0	260	10.24	180	7.09	247	9.72	251	9.88	30.5	67.24	H	6
GE225-6	6	225	124.0	244	9.61	190	7.48	275	10.83	275	10.83	31	68.34	H	6
GE230-6	6	230	126.5	260	10.24	180	7.09	247	9.72	251	9.88	31.5	69.44	H	6
GE310-6	6	310	170.5	295	11.61	178	7.01	345	13.58	350	13.78	47	103.62	H	6
GE450-6	6	450	247.5	295	11.61	179	7.05	404	15.91	424	16.69	57.4	126.54	H	6
GE24A-12	12	24	14.3	167	6.57	176	6.93	125	4.92	125	4.92	7.5	16.53	E	2
GE24-12	12	24	15.4	166	6.54	125	4.92	175	6.89	175	6.89	7.6	16.75	E	2
GE26-12	12	26	24.7	166	6.54	125	4.92	175	6.89	175	6.89	9	19.84	E	2
GE28-12	12	28	26.6	196	7.72	131	5.16	155	6.10	167	6.57	9.5	20.94	F	2
GE33-12	12	33	17.6	196	7.72	131	5.16	155	6.10	167	6.57	10.5	23.15	F	2
GE35-12	12	35	19.3	196	7.72	131	5.16	155	6.10	167	6.57	12	26.46	F	2
GE38-12	12	38	20.9	197	7.76	165	6.50	170	6.69	170	6.69	11.8	26.01	F	2
GE40-12	12	40	22.0	197	7.76	165	6.50	170	6.69	170	6.69	12.5	27.56	F	2
GE55-12	12	55	30.3	228	8.98	138	5.43	208	8.19	227	8.94	15.4	33.95	F	1
GE60-12	12	60	33.0	260	10.24	169	6.65	210	8.27	214	8.43	18.3	40.34	F	1
GE65-12	12	65	35.8	348	13.70	168	6.61	178	7.01	178	7.01	19.5	42.99	F	1
GE75-12	12	75	41.2	260	10.24	168	6.61	208	8.19	231	9.09	20.6	45.41	F	1
GE80-12	12	80	44.0	260	10.24	168	6.61	208	8.19	231	9.09	20.8	45.86	F	1
GE90-12	12	90	49.5	329	12.95	172	6.77	215	8.46	243	9.57	26.5	58.42	G	1
GE100-12	12	100	55.0	329	12.95	172	6.77	215	8.46	243	9.57	28	61.73	G	1
GE100A-12	12	100	55.0	339	13.35	172	6.77	212	8.35	217	8.54	29	63.93	G	1
GE100-12	12	100	55.0	407	16.02	175	6.89	208	8.19	238	9.37	30.5	67.24	G	1
GE105-12	12	105	57.8	407	16.02	175	6.89	208	8.19	238	9.37	31.2	68.78	G	1
GE120-12	12	120	66.0	407	16.02	175	6.89	208	8.19	238	9.37	33.7	74.30	G	1
GE134-12	12	134	73.7	341	13.43	173	6.81	281	11.06	288	11.34	41.5	91.49	G	1
GE150-12	12	150	82.5	483	19.02	170	6.69	241	9.49	241	9.49	43.5	95.90	G	1
GE180A-12	12	180	99.0	532	20.94	207	8.15	214	8.43	240	9.45	49	108.03	G	3
GE180-12	12	180	99.0	522	20.55	240	9.45	218	8.58	244	9.61	55.7	122.80	G	3
GE200-12	12	200	110.0	522	20.55	240	9.45	218	8.58	244	9.61	58.5	128.97	G	3
GE230-12	12	230	126.5	520	20.47	269	10.59	203	7.99	226	8.90	59	130.07	H	3
GE240-12	12	240	132.0	520	20.47	269	10.59	203	7.99	226	8.90	60	132.28	H	3
GE250-12	12	250	137.5	520	20.47	268	10.55	220	8.66	249	9.80	68.2	150.35	H	3
GE260-12	12	260	143.0	520	20.47	269	10.59	220	8.66	209	8.23	77	169.75	H	3

Layout

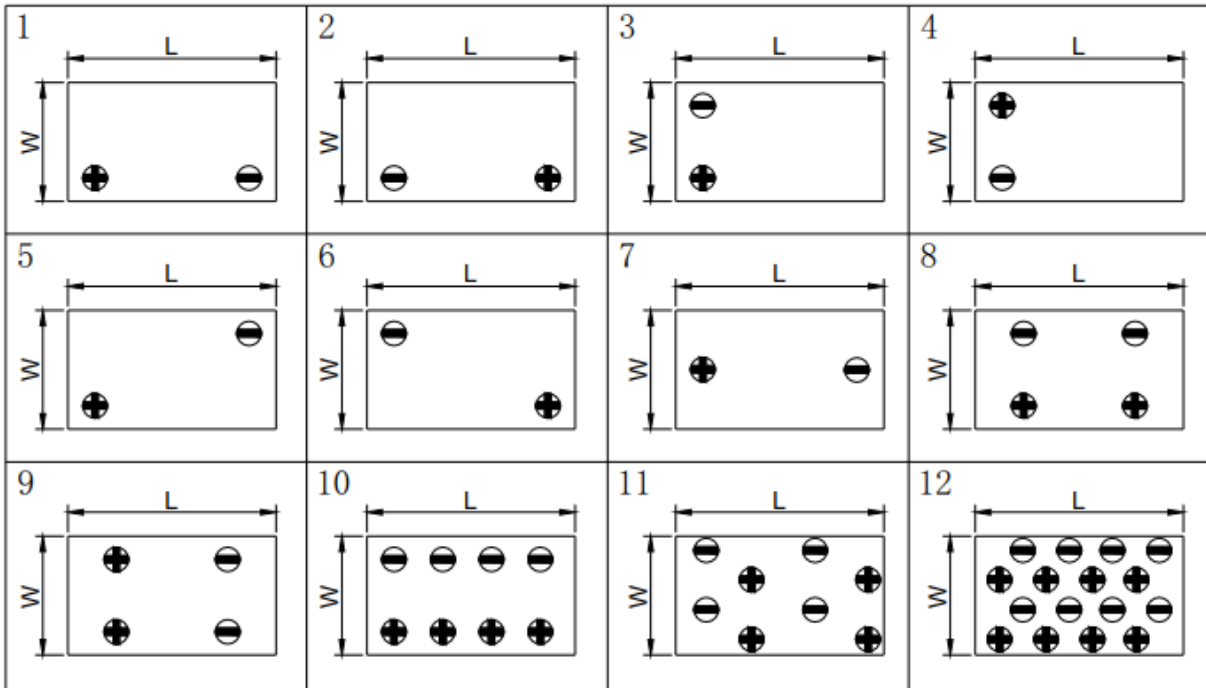

Terminal type:

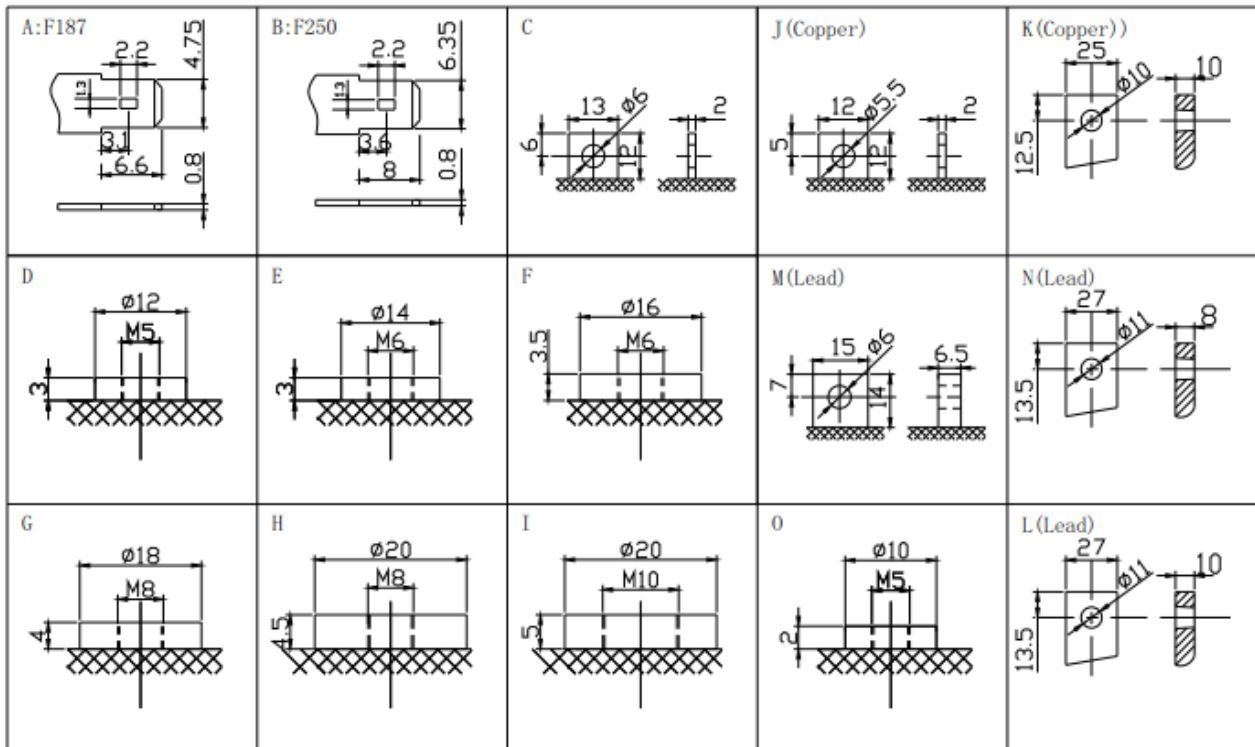

Guangdong JiYi General Electric Co., Ltd

Overseas sales office Tel: +86-020-84869873

Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335

Fax: 020-34628335

E-mail: ge@gerch.cn

GERCH[®]

HTTP: //WWW.GERCH.CN