

Micro Series battery:

Gerch Micro Series Sealed Rechargeable Lead-Acid battery are designed with AGM(Absorbent Glass Mat) technology for general applications purpose , such as ups , telecom , and electric utilities. With 5 years designed life in float service.


General Specifications

Micro Series Sealed Rechargeable Lead-Acid Batteries

Model	Nominal Voltage(V)	Rated Capacity@25℃		Approx Dimensions								Approx Weight		Terminals Type	Layout
		20HR	10HR	Length		Width		Hight		Total Hight		kgs.	lbs.		
		1.75V/Cell	1.70V/Cell	mm	in.	mm	in.	mm	in.	mm	in.				
GE0.4-6	6	0.4	0.38	97	3.82	24	0.94	53	2.09	58	2.28	0.12	0.26	A	1
GE0.5-6	6	0.5	0.48	57	2.24	14	0.55	52	2.05	52	2.05	0.12	0.26		
GE0.8-6	6	0.8	0.76	97	3.82	24	0.94	53	2.09	58	2.28	0.25	0.55	A	1
GE1.0-6	6	1	0.95	97	3.82	24	0.94	53	2.09	58	2.28	0.26	0.57	A	1
GE1.2-6	6	1.2	1.14	97	3.82	24	0.94	53	2.09	58	2.28	0.3	0.66	A	1
GE1.3-6	6	1.3	1.2	97	3.82	24	0.94	53	2.09	58	2.28	0.32	0.71	A	1
GE2-6	6	2	0.19	135	5.31	35	1.38	60	2.36	65	2.56	0.58	1.28	A	1
GE2.8-6	6	2.8	2.66	135	5.31	35	1.38	60	2.36	65	2.56	0.59	1.30	A	1
GE3-6	6	3.0	2.85	135	5.31	35	1.38	60	2.36	65	2.56	0.62	1.37	A	1
GE3.2-6	6	3.2	3.04	135	5.31	35	1.38	60	2.36	65	2.56	0.64	1.41	A	1
GE3.3-6	6	3.3	3.1	135	5.31	35	1.38	60	2.36	65	2.56	0.65	1.43	A	1
GE4-6	6	4	3.8	70	2.76	47	1.85	101	3.98	105	4.13	0.75	1.65	A	5
GE4.5-6	6	4.5	4.2	70	2.76	47	1.85	101	3.98	105	4.13	0.85	1.87	A	5
GE5-6	6	5	4.8	70	2.76	47	1.85	101	3.98	105	4.13	0.95	2.09	A	5
GE6-6	6	6	5.7	70	2.76	47	1.85	101	3.98	105	4.13	0.97	2.14	A	5
GE7-6	6	7	6.8	151	5.94	34	1.34	94	3.70	98	3.86	1.0	2.20	A or B	1
GE7.5-6	6	7.5	7.2	151	5.94	34	1.34	94	3.70	98	3.86	1.2	2.65	A or B	1
GE8-6	6	8	7.6	151	5.94	34	1.34	94	3.70	98	3.86	1.25	2.76	A or B	1
GE9-6	6	9	8.55	151	5.94	34	1.34	94	3.70	98	3.86	1.25	2.76	A or B	1
GE8.5-6	6	8.5	8.1	99	3.90	57	2.24	118	4.65	118	4.65	1.5	3.31		
GE10-6	6	10	9.5	151	5.94	50	1.97	95	3.74	99	3.90	1.6	3.53	B	1
GE12-6	6	12	11.4	151	5.94	50	1.97	95	3.74	99	3.90	1.75	3.86	B	1
GE14-6	6	14	13.3	151	5.94	50	1.97	95	3.74	99	3.90	1.8	3.97	B	1
GE1.0-12	12	1	0.95	97	3.82	43.5	1.71	51	2.01	56	2.20	0.5	1.10	A	4
GE1.2-12	12	1.2	1.14	97	3.82	43.5	1.71	51	2.01	56	2.20	0.5	1.10	A	4
GE1.3-12	12	1.3	1.2	97	3.82	43.5	1.71	51	2.01	56	2.20	0.6	1.32	A	4
GE1.4-12	12	1.4	1.33	97	3.82	43.5	1.71	51	2.01	56	2.20	0.7	1.54	A	4
GE1.9-12	12	1.9	1.8	178	7.01	34.5	1.36	61	2.40	65	2.56	0.85	1.87	A	1
GE2-12	12	2	1.9	178	7.01	34.5	1.36	61	2.40	65	2.56	0.9	1.98	A	1
GE2.2-12	12	2.2	2	178	7.01	34.5	1.36	61	2.40	65	2.56	0.9	1.98	A	1
GE2.3-12	12	2.3	2.18	178	7.01	34.5	1.36	61	2.40	65	2.56	1.0	2.20	A	1
GE2.3A-12	12	2.3	2.18	181	7.13	23	0.91	61	2.40	61	2.40	0.9	1.98		
GE2.6-12	12	2.6	2.47	70	2.76	47	1.85	101	3.98	106	4.17	0.9	2.07	A	1
GE2.8-12	12	2.8	2.66	90	3.54	70	2.76	102	4.02	106	4.17	1.4	3.09	A	1
GE3.3-12	12	3.3	3	135	5.31	67	2.64	61	2.40	66	2.60	1.4	3.09	A	3
GE3-12	12	3	3.14	90	3.54	70	2.76	102	4.02	106	4.17	1.4	3.09	A	1
GE3.2-12	12	3.2	3.04	90	3.54	70	2.76	102	4.02	106	4.17	1.4	3.09	A	1
GE3.4-12	12	3.4	3.23	90	3.54	70	2.76	102	4.02	106	4.17	1.45	3.20	A	1
GE3.8-12	12	3.8	3.61	90	3.54	70	2.76	102	4.02	106	4.17	1.5	3.31	A	1
GE4-12	12	4	3.8	90	3.54	70	2.76	102	4.02	106	4.17	1.5	3.31	A	1
GE4.5-12	12	4.5	4.2	90	3.54	70	2.76	102	4.02	106	4.17	1.6	3.53	A	1
GE5-12	12	5	4.8	90	3.54	70	2.76	102	4.02	106	4.17	1.65	3.64	A	1
GE5.2-12	12	5.2	4.94	90	3.54	70	2.76	102	4.02	106	4.17	1.7	3.75	A	1
GE5.4-12	12	5.4	5.13	90	3.54	70	2.76	102	4.02	106	4.17	1.8	3.97	A	1
GE5.5-12	12	5.5	5.22	90	3.54	70	2.76	102	4.02	106	4.17	1.85	4.08	A	1
GE6.2-12	12	6.2	5.8	151	5.94	65	2.56	94	3.70	99	3.90	1.9	4.19	E	3 or 4
GE6.5-12	12	6.5	6.2	151	5.94	65	2.56	94	3.70	99	3.90	2	4.41	E	3 or 4

GE7-12	12	7	6.7	151	5.94	65	2.56	94	3.70	99	3.90	2.05	4.52	A or B	3 or 4
GEH7.2-12	12	7.2	6.84	151	5.94	65	2.56	94	3.70	99	3.90	2.15	4.74	A or B	3 or 4
GE8.5-12	12	8.5	8.13	151	5.94	65	2.56	94	3.70	99	3.90	2.35	5.18	A or B	3 or 4
GE9-12	12	9	8.55	151	5.94	65	2.56	94	3.70	99	3.90	2.4	5.29	A or B	3 or 4
GE10-12	12	10	9.5	151	5.94	98	3.86	98	3.86	102	4.02	3.2	7.05	B	4
GE13-12	12	13	12.35	151	5.94	98	3.86	98	3.86	102	4.02	3.8	8.38	B	4
GE14-12	12	14	13	151	5.94	98	3.86	98	3.86	102	4.02	4.2	9.26	B	4
GE17-12	12	17	16.15	181	7.13	76	2.99	167	6.57	167	6.57	5.5	12.13	C	2
GE18-12	12	18	17.1	181	7.13	76	2.99	167	6.57	167	6.57	5.8	12.79	C	2
GE20-12	12	20	18.5	181	7.13	76	2.99	167	6.57	167	6.57	6.4	14.11	C	2

Layout:

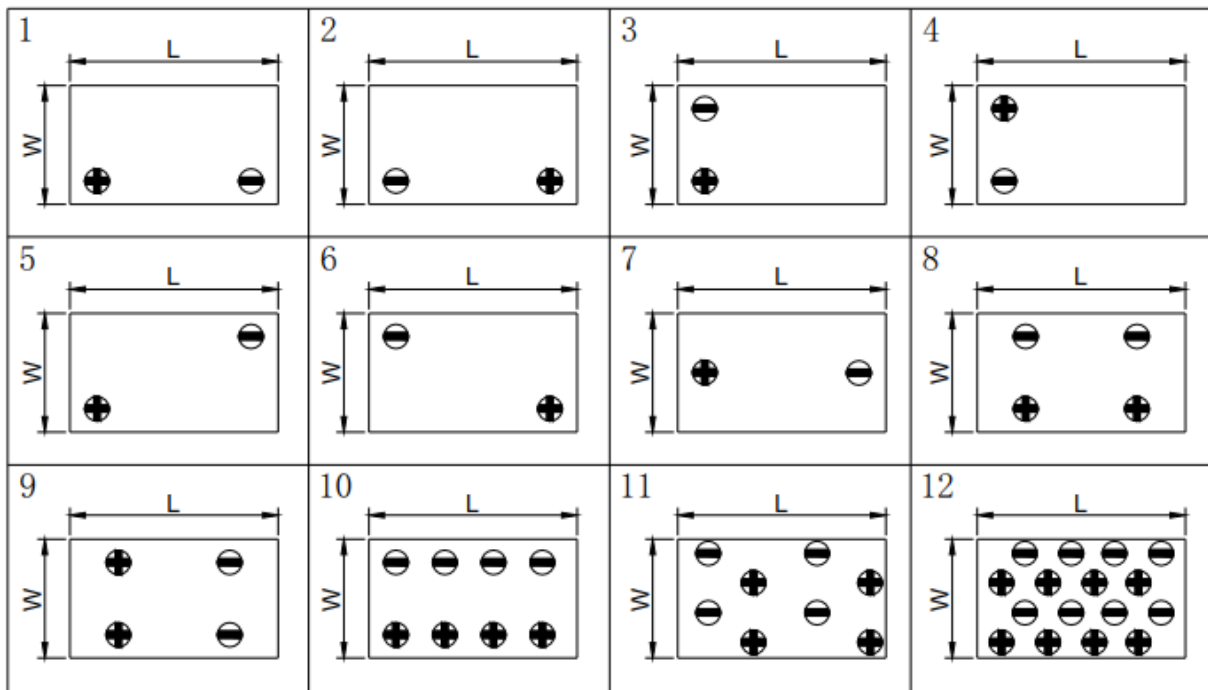

Terminal type:

<p>A:F187</p>	<p>B:F250</p>	<p>C</p>	<p>J (Copper)</p>	<p>K (Copper)</p>
<p>D</p>	<p>E</p>	<p>F</p>	<p>M (Lead)</p>	<p>N (Lead)</p>
<p>G</p>	<p>H</p>	<p>I</p>	<p>O</p>	<p>L (Lead)</p>

Guangdong JiYi General Electric Co., Ltd

Oversea sales office Tel: +86-020-84869873 Fax: +86-020-34628335

Domestic sales office Tel: 020-34628335 Fax: 020-34628335

E-mail:ge@gerch.cn

GERCH[®]

HTTP: //WWW.GERCH.CN